


## File 30 Suspension double emission

code F3043.840P/01

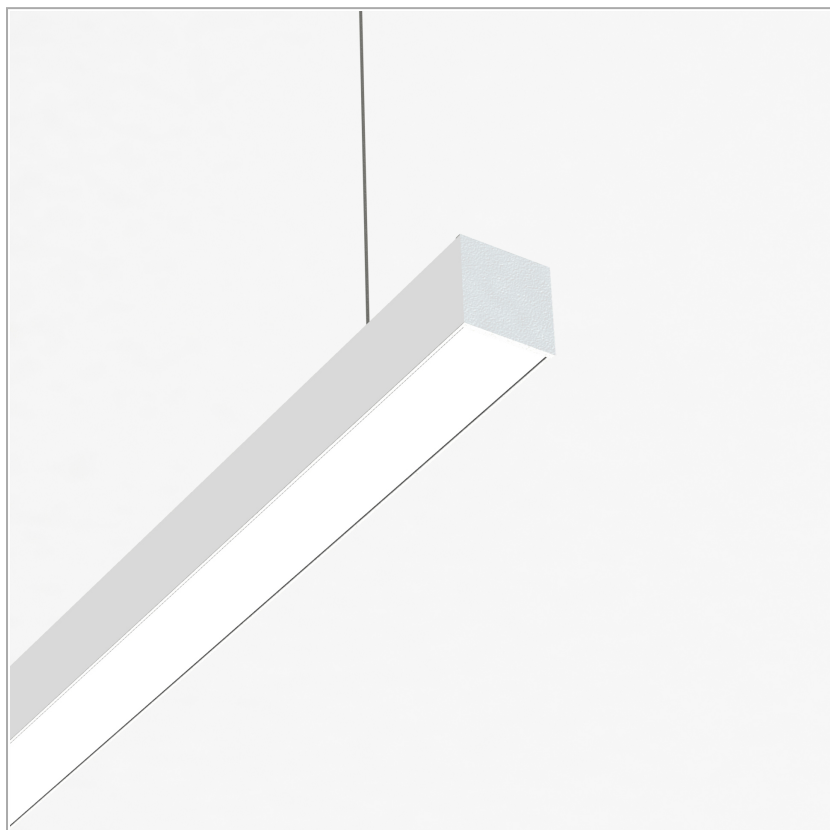


### PRODUCT DESCRIPTION

Lamp with direct and indirect light from indoor suspension, extruded aluminum profile 30x30mm, color rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP20. Requires remote system for electronic power supply.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Suspension                  |
| Light source                 | Linea Led                   |
| Absorbed power               | 34,3 W / 16,8 W             |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90 / >80                   |
| Optic                        | Opal polycarbonate diffuser |
| Finishing                    | White                       |
| Luminous flux of the product | 3529 lm / 844 lm            |
| Luminous efficiency          | 103 lm/W / 50.23 lm/W       |
| MacAdam color tolerance      | 3                           |
| Weight                       | 1.10 Kg                     |
| Dimension                    | L1564 mm                    |
| IP Grade                     | IP40                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

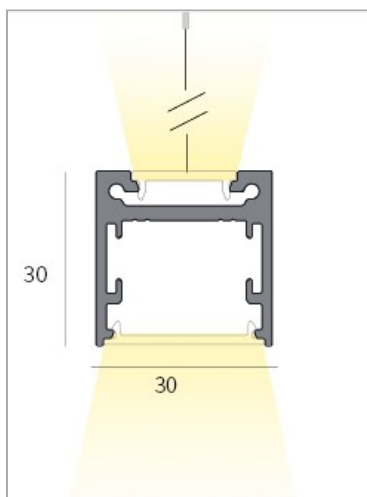

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Microfile System Ower cable (L.2000mm) kit with ceiling canopy DRIVER INCLUDED



code MFH00SA/01

system indoor item. Bianco finishing item

Technical Sheet



code MFH00SB/01

system indoor item. Bianco finishing item

Technical Sheet

