


## Leva 5 SOFT ROTATE & SLIDE MECHANISM TRIMLESS - kit

code LV051K.940F/01

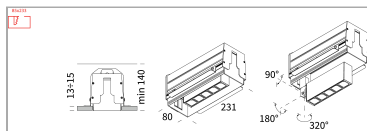

### PRODUCT DESCRIPTION

Fix and adjustable projectors programme for chip on board LED sources. Mounting options: with frame and trimless recessed, ceiling and wall-mounted, 230V Eurostandard track and within the Lucifero's Container for Minifile and File 2. Fixture's body in painted extruded aluminum. Optical group complete with chip on board led, lens, antiglare housing and driver (except recessed versions and 1x and 3x ceiling/wall-mounted versions). Adjustable version for ceiling/ wall mounting and for insertion within the Container for Minifile provided with special patented Soft Rotate & Slide mechanism, that allows the projector's extraction and aiming of 350° on the vertical axis and of 350° on the horizontal axis. Adjustable version for insertion within the Container for File 2 provided with special tilt mechanism, that allows the projector's extraction and aiming of +/-45° on the horizontal axis. Spot, flood and wide optics. UGR<19. Degree of protection IP23/43.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Trimless recessed       |
| Light source                 | LED                     |
| Absorbed power               | 5x2,2 W                 |
| Color temperature            | 4000K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Flood 32°               |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 952 lm                  |
| Luminous efficiency          | 87 lm/W                 |
| MacAdam color tolerance      | 2                       |
| Life time estimate           | 50000h Ta 25° L90B10    |
| Energy efficiency class      | E                       |
| Dimension                    | L231xW80xH140 mm        |
| Hole size                    | 85X233 mm               |
| IP Grade                     | IP20                    |
| Protection Class             | Class III appliance     |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

## MANDATORY ACCESSORIES

### Box Leva 5 trimless tilting



code LV005C/01

Box Leva 5 trimless tilting

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori INTERNAL LIGHT KIT 5

code LVKIT527

uncategorized

Technical Sheet



code LVKIT535

uncategorized

Technical Sheet



code LVKIT540

uncategorized

Technical Sheet



code LVKIT530

uncategorized

Technical Sheet

