

DIGI Track

code DG603.930SD/01





PRODUCT DESCRIPTION

Cylindrical projector with aluminium shell with a diameter of 17W or 24W or 32W indoor, swivel, available in versions with beam opening at 15, 24, or 38, epoxy powder coated. Includes shuttle with built-in power supply for 230V track power and with dimming option. Available accessories: decorative ring with front lens.

PRODUCT SPECS

Installation method	Track
Light source	LED
Absorbed power	32 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	3006 lm
Luminous efficiency	94 lm/W
MacAdam color tolerance	3
Durata media stimata	3SDCM 50000h L90 B10 Ta 25°C
Power supply/transformer	Included
Protocol	Dimmable Dali
Dimension	H94 Ø90 mm
IP Grade	IP20

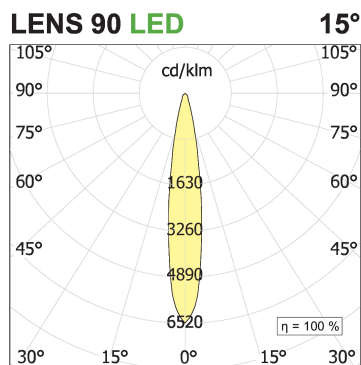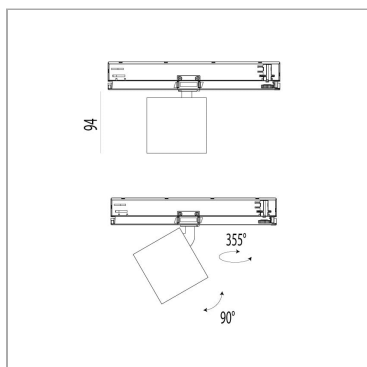

WEB PAGE



OPTIONAL ACCESSORIES

Accessori Lens With Ring Asymmetric lens with ring ø85



code L085A.A

uncategorized. White finishing

Technical Sheet



code L085A.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Elipsoid lens with ring ø85



code L085E.A

uncategorized. White finishing

Technical Sheet



code L085E.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Honeycomb louver with ring ø85



code L085R.A

uncategorized. White finishing

Technical Sheet





code L085R.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Satin lens with ring ø85



code L085S.A

uncategorized. White finishing

Technical Sheet



code L085S.A

uncategorized. Black finishing

Technical Sheet

