
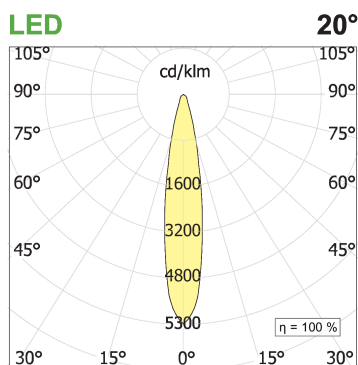
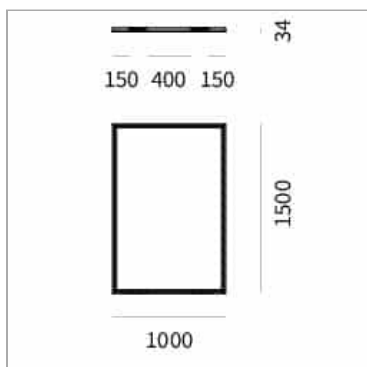


## File Flex Square P1015 Ceiling Mounted .

code FXP02.930S/01



### PRODUCT DESCRIPTION

File Flex is a patented products of Lucifero's made of versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Ceiling surface mounted         |
| Light source                 | LED                             |
| Absorbed power               | 22 W                            |
| Color temperature            | 3000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Spot 20°                        |
| Finishing                    | White                           |
| Luminous flux of the product | 853 lm                          |
| Luminous efficiency          | 39 lm/W                         |
| MacAdam color tolerance      | 2                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Energy efficiency class      | D                               |
| Weight                       | 6.2 Kg                          |
| Dimension                    | L34xW1000xH1500 mm              |
| IP Grade                     | IP20                            |
| Protection Class             | Class III appliance             |
| Product Spec                 | Rectangular shape               |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 2

