




Iferrosi Floor POLE H1300-60

code IF05.927W/99

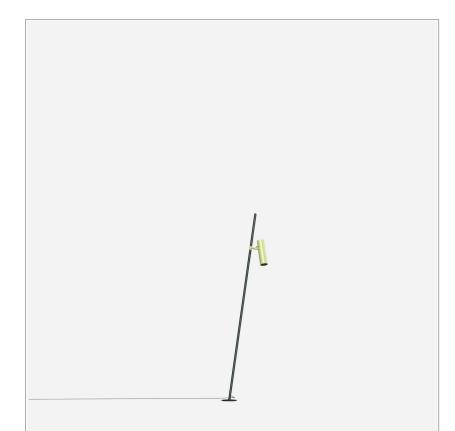



IFERROSI 60 6,7W LED38°



D 700 IP66 IK07 (CE) KE (CE)

TECHNICAL SHEET 20.05.2024

PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	Floor
Light source	Led
Absorbed power	6,7 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Grafite
Luminous flux of the product	443 lm
Luminous efficiency	66 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	2.6 Kg
Dimension	L60x350Hx1365 mm
IP Grade	lp66
Protection Class	Class III appliance





ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time. Page 1 / 1