




File Flex Square Suspension S158.

code FXS04.940F/01

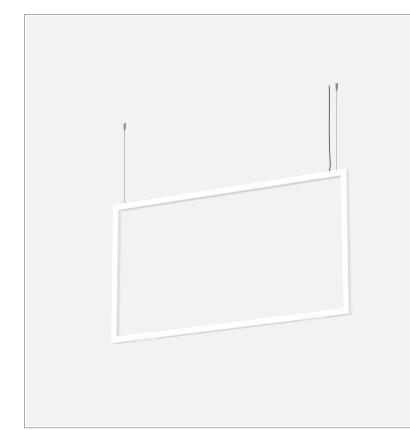







PRODUCT DESCRIPTION

File Flex is a patented products of Lucifero's mado of versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36

PRODUCT SPECS

| Installation method | Suspension |
|------------------------------|---------------------------------|
| Light source | LED |
| Absorbed power | 22 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Optic | Flood 32° |
| Finishing | White |
| Luminous flux of the product | 872 lm |
| Luminous efficiency | 40 lm/W |
| MacAdam color tolerance | 2 |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Energy efficiency class | D |
| Weight | 5.9 Kg |
| Dimension | W1500xH800+4000 mm |
| IP Grade | IP20 |
| Protection Class | Class III appliance |
| Product Spec | Rectangular shape |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time. Page 1 / 2

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

Accessori File Flex CANOPY, DRIVER INCLUDED max 38W



code FXS100/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.