
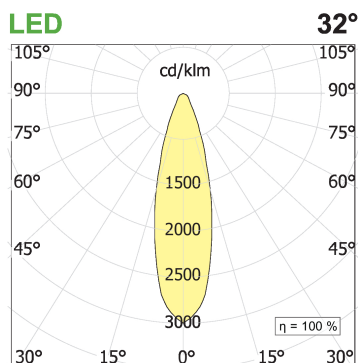
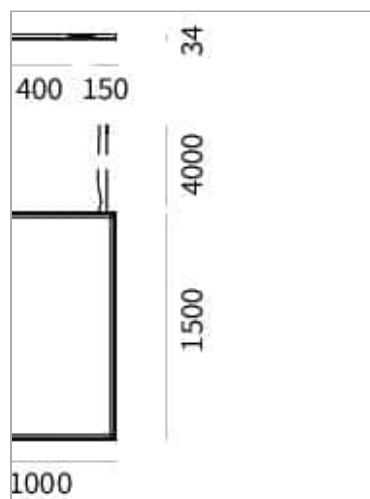


File Flex Square S1015 Suspension

code FXS02.930F/01

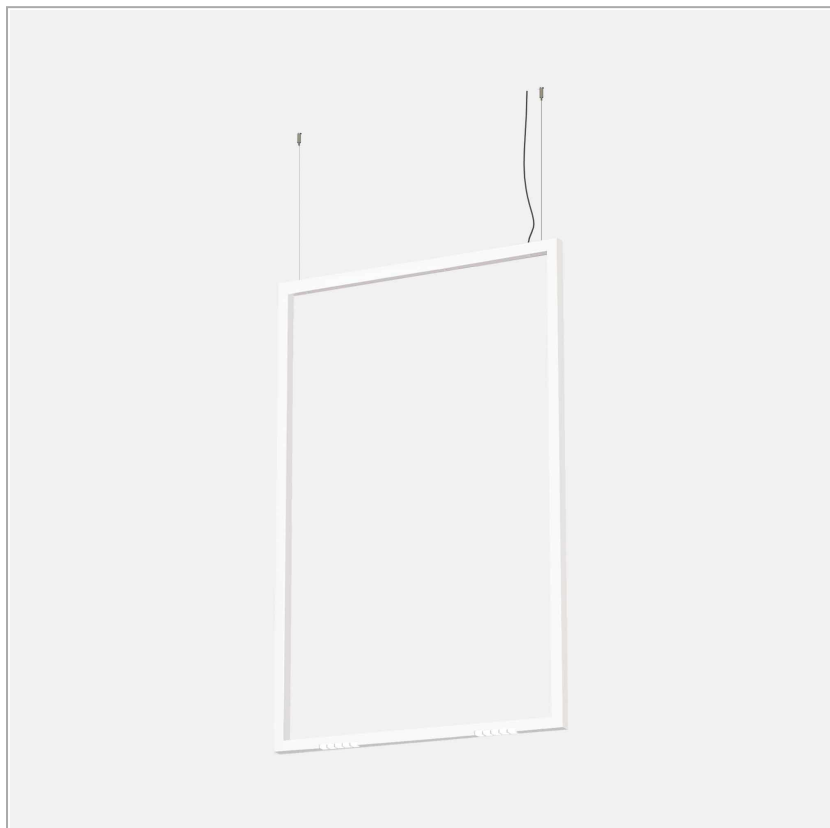

PRODUCT DESCRIPTION

File Flex is a patented products of Lucifero's made of versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36

PRODUCT SPECS

Installation method	Suspension
Light source	Led-en
Absorbed power	22 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White
Luminaire luminous flux	853 lm
Luminous efficiency	39 lm/W
MacAdam color tolerance	2
Power supply/transformer	Not included
Energy efficiency class	D
Weight	6.2 Kg
Dimension	L34Wx1000Hx1500 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori File Flex CANOPY, DRIVER INCLUDED max 38W



code FXS100

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



code FXS100

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet

