


code FP024.930WID/01



Direct light indoor lamp for track system three phases made of extruded 6060 aluminium; assembled and wired on extruded aluminium; color rendering index CRI >90. Protocol Dimmable Dali; Lamp with white powder-coated finish; high efficiency professional optics in polycarbonate; beam . IP40 protection rating.

Installation method	Track
Light source	LED pro
Absorbed power	96 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	60° UGR
Finishing	White
Luminous flux of the product	14813 lm
Luminous efficiency	154 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	D
Weight	5.4 Kg
Dimension	L1726 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

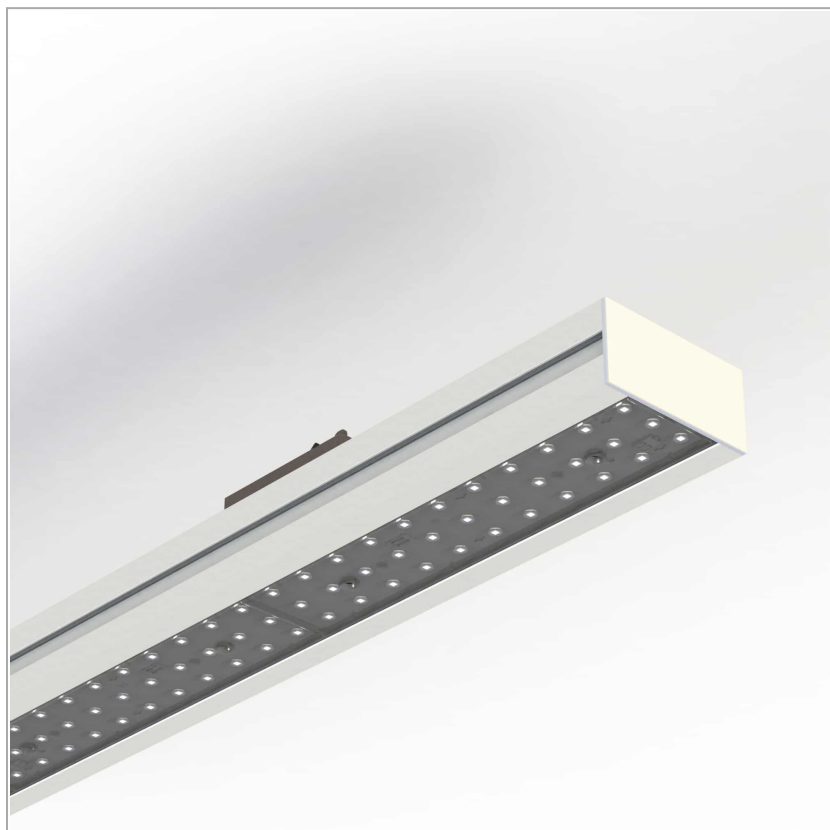