
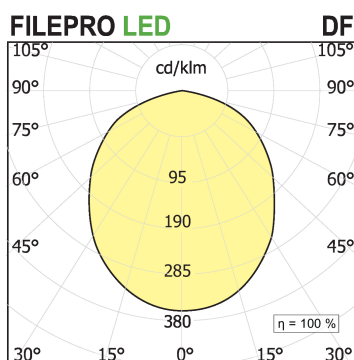


File Pro Suspension

code FP004.930DFD/01

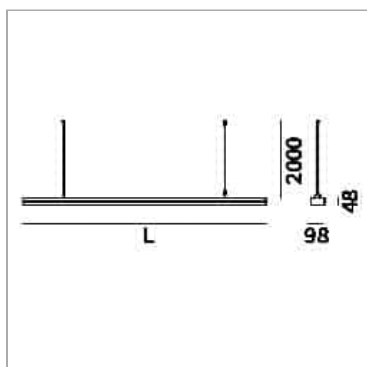

PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded 6060 aluminium; assembled and wired on extruded aluminium; color rendering index CRI >90. Protocol Dimmable Dali. Complete with steel suspension cables with micrometric adjuster to adjust the height and balance stabilizer to adjust the horizontality of the product; Lamp with white powder-coated finish; high efficiency professional optics in polycarbonate; beam . IP40 protection rating.

PRODUCT SPECS

Installation method	Suspension
Light source	LED pro
Absorbed power	28,7 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Diffused
Finishing	White
Luminous flux of the product	3821 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	D
Weight	5.2 Kg
Dimension	L1440 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1