

LBS ceiling perimetric emission - Without linear LED

code LB001.8U/01




PRODUCT DESCRIPTION


LBS is a thin band of extruded aluminium section and it is possible to install it in many different ways. It consists of basic modules and, depending on the way they are assembled, it can be arch shaped (to be installed on a wall), circular shaped (to create swinging, ceiling and trimless recessed fixtures) or it may have a curving shape (to form a band which twists and turns on the ceiling, for instance). The extruded part, representing its body, is drawn in such a way to be able to house the linear LED light source, shaded with a white opal diffuser, both on the inside vertical side and therefore to give out light on its horizontal axis, and on its narrower and horizontal side and consequently to give out light on its vertical axis (indirect one). It is also available in ceiling, pendant and trimless recessed version with diffused direct light emission. Additionally, LBS also allows to make use of directional projectors, that can be hooked and wired to the profile.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Finishing	White
Dimension	Ø735 mm

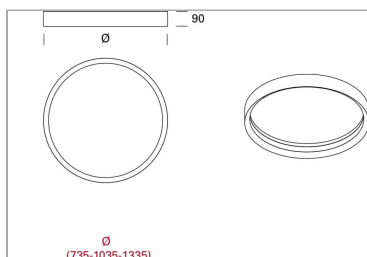

LBS perimetral LED

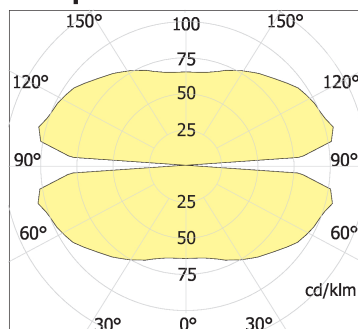

WEB PAGE



OPTIONAL ACCESSORIES

Lbs System Spot



code LB102.927FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.927FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.927F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.927WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.927WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.927W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet





code LB102.930FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.930FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.930F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.930WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.930WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.930W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet





code LB102.940FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.940FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.940F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.940WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.940WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB102.940W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet





code LB103.927FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.927FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.927F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.927WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.927WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.927W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet





code LB103.930FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.930FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.930F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.930WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.930WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.930W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of ± 90 , equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet





code LB103.940FD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.940FD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.940F/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.940WD/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.940WD10/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



code LB103.940W/01

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of $\pm 90^\circ$, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

Technical Sheet



linear led ST22 3D

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances $\pm 10\%$. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 7 / 8



code ST22.3D30.5

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code ST22.3D40.5

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet

