

File Flex Outdoor Elle 1

code FXG31.930Z/01





PRODUCT DESCRIPTION

Family of outdoor lighting fixtures - floor, wall, ceiling or suspended –realized by extruded aluminum profiles with curvilinear shapes. Versions with LED linear source with extruded opal flexible silicone screen for diffused light and versions with multi-optic LED modules of the Leva series for accent lighting are available. IP66.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	6,6 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°°
Finishing	White
Luminous flux of the product	651 lm
Luminous efficiency	99 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Dimension	L34xW187xH718 mm
IP Grade	Ip56
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

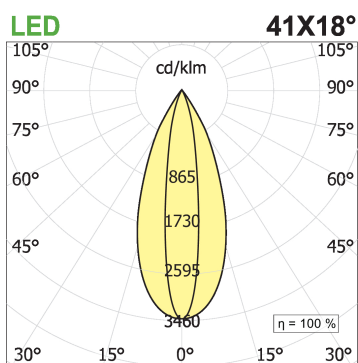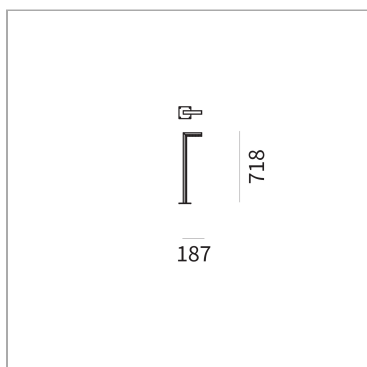

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE700.14IP (Copia)



code AE700.12IP

Electronic power supply current

