
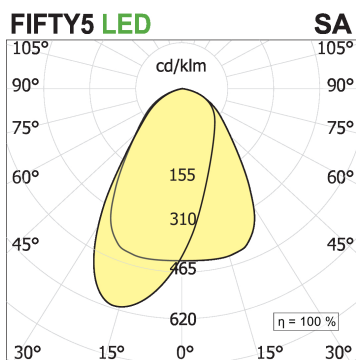


Fifty5 Pro Suspension LED

code FT025.927SAD/01

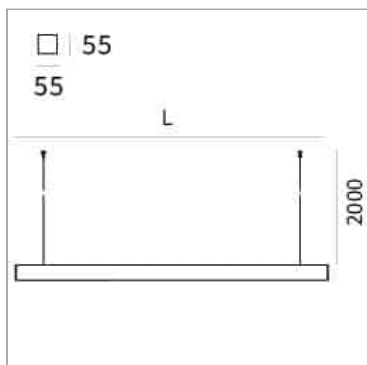

PRODUCT DESCRIPTION

Linear lighting fixtures, in extruded aluminum 55x55mm, for ceiling, suspension. Embossed painted finish. Screens for diffused light in opal polycarbonate, for the PRO version are available optics with different beam openings. Might be equipped, if necessary, with spectra for horticulture. IP40 / IP43. Available default modules and modular system.

PRODUCT SPECS

| | |
|---------------------------|-------------------|
| Installation method | Suspension |
| Light source | Led |
| Absorbed power | 70,2 W |
| Color temperature | 2700K |
| Color rendering index CRI | >90 |
| Optic | Single asym |
| Finishing | White |
| Luminaire luminous flux | 9438 lm |
| Luminous efficiency | 134 lm/W |
| Power supply/transformer | Included |
| Protocol | Dimmable |
| Energy efficiency class | D |
| Dimension | L1702 mm |
| IP Grade | IP20 |
| Protection Class | Class I appliance |

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances $\pm 10\%$. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1