


Fifty5 System - Reglette LED

code FT157.827D

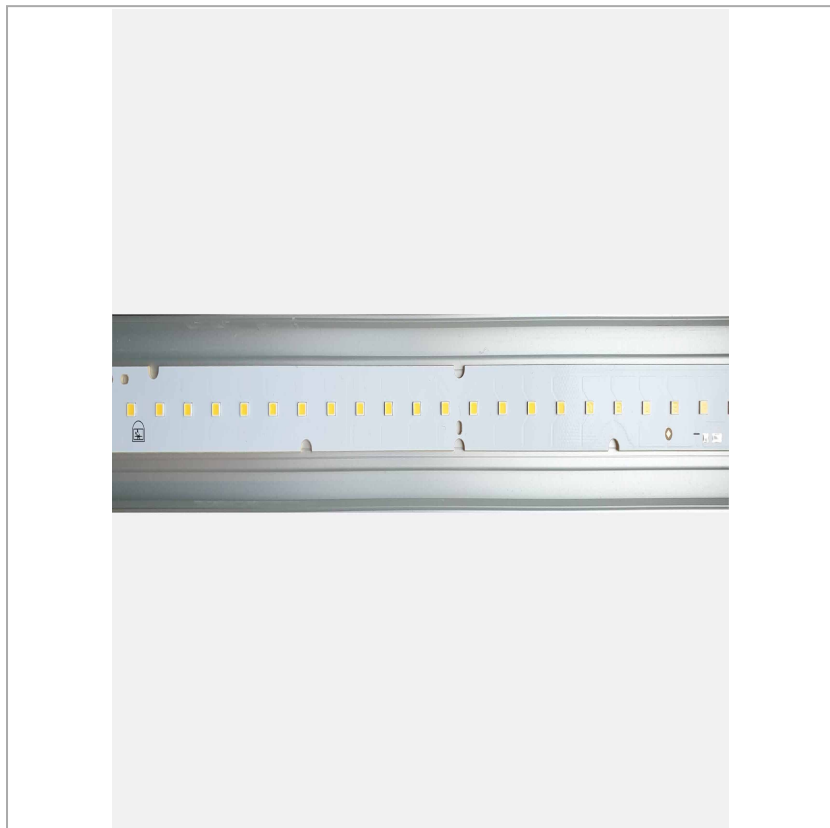


PRODUCT DESCRIPTION

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	51,2 W
Color temperature	2700K
Color rendering index CRI	>90
Luminous flux of the product	7936 lm
Luminous efficiency	155 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L2262 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

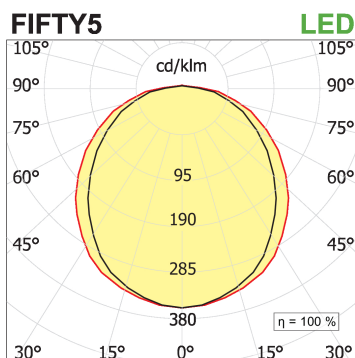

WEB PAGE



ASSEMBLY INSTRUCTIONS

