


## Iride Outdoor 86L

code IR04IP.930FD/01


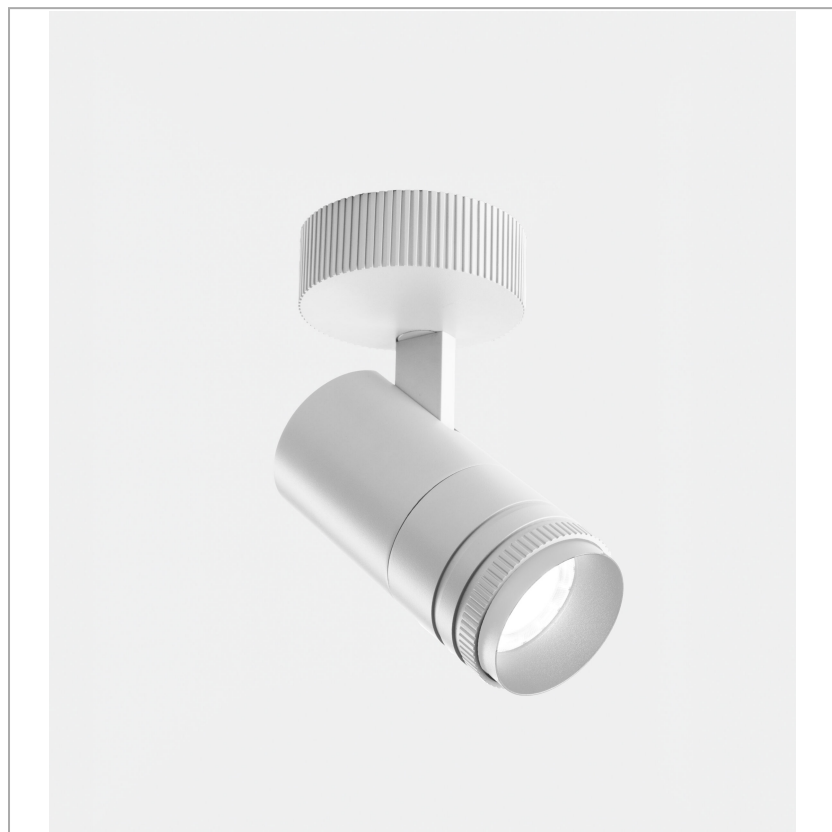


## PRODUCT DESCRIPTION

Outdoor ceiling/wall projector complete with led 18 W, beam 24°, colour rendering index CRI>90. Colour finish white. Body lamp and optical group made of die-cast aluminum powder-coated, aluminum joint, rotation of the optical group of 355 °. on the vertical axis and 90 °. on the horizontal axis. Snoot in lamp finish or finishing choice. High performance lens. Possibility of insertion of Honey Comb filter.

## PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	18 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	White
Luminous flux of the product	1832 lm
Luminous efficiency	102 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	Ø86 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

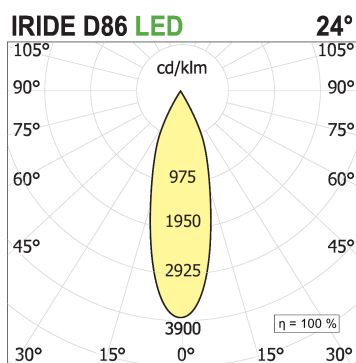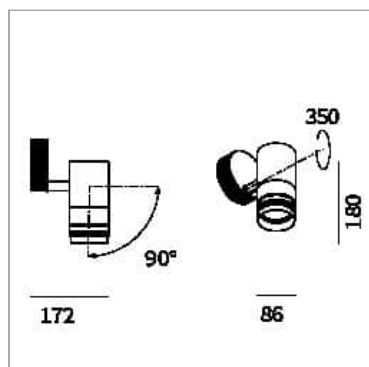

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

