




Leva 15 recessed - kit

code LV015K..940S/01

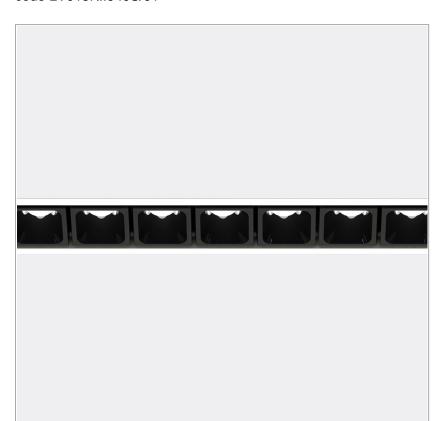













PRODUCT DESCRIPTION

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 20° UGR<16. Protection rating IP20.

PRODUCT SPECS

Light source Absorbed power 15x2,2 W Color temperature 4000K Color rendering index CRI Optic Spot 20° Finishing White Luminous flux of the product Luminous efficiency 93 lm/W	Installation method	Recessed with frame
Color temperature 4000K Color rendering index CRI >90 Optic Spot 20° Finishing White Luminous flux of the product 3075 lm	Light source	LED
Color rendering index CRI >90 Optic Spot 20° Finishing White Luminous flux of the product 3075 lm	Absorbed power	15x2,2 W
Optic Spot 20° Finishing White Luminous flux of the product 3075 lm	Color temperature	4000K
Finishing White Luminous flux of the product 3075 lm	Color rendering index CRI	>90
Luminous flux of the product 3075 lm	Optic	Spot 20°
- manufacture and product of the control of the con	Finishing	White
Luminous efficiency 93 lm/W	Luminous flux of the product	3075 lm
	Luminous efficiency	93 lm/W
MacAdam color tolerance 2	MacAdam color tolerance	2
Life time estimate 50000h Ta 25° L90B10	Life time estimate	50000h Ta 25° L90B10
Energy efficiency class E	Energy efficiency class	E
Weight 0.30 Kg	Weight	0.30 Kg
Dimension L450xW27xH60 mm	Dimension	L450xW27xH60 mm
Hole size 34X456 mm	Hole size	34X456 mm
Power supply/Transformer Not included	Power supply/Transformer	Not included
Protocol See power supply	Protocol	See power supply

WEB PAGE



ASSEMBLY



MANDATORY ACCESSORIES

Accessori Leva Wallbox F 15



code LV015F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling



AE700.32C1.MP (Copia) (Copia)



code AE700.30C.MP-1

Electronic power supply current



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete - Leva15



code CCLV15

Formwork for masonry and concrete, suitable for Leva15. Internal length 457mm - external length 459,4mm

