

## File 2H double emission wall

code F2H12.840PD/01



### PRODUCT DESCRIPTION


Direct and indirect light with opal diffuser

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Wall surface mounted        |
| Light source                 | LED                         |
| Absorbed power               | 2x25,6 W                    |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Opal polycarbonate diffuser |
| Finishing                    | White                       |
| Luminous flux of the product | 3499 lm                     |
| Luminous efficiency          | 68 lm/W                     |
| MacAdam color tolerance      | 3                           |
| Life time estimate           | 50000h Ta 25° L80B10        |
| Protocol                     | Dimmable Dali               |
| Energy efficiency class      | E                           |
| Dimension                    | L1140 mm                    |



### FILE2H opal biemission LED

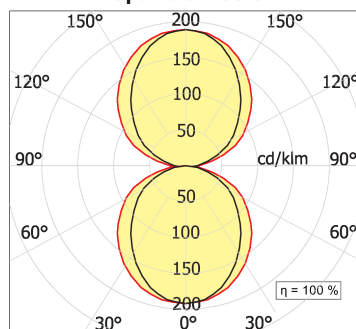

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

