

File 2H double emission wall

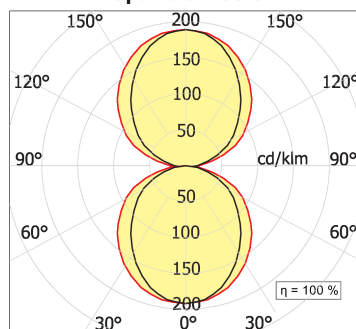
code F2H16.840PD/01

**PRODUCT DESCRIPTION**

Direct and indirect light with opal diffuser

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x51,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	6999 lm
Luminous efficiency	68 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L2265 mm

**FILE2H opal biemission LED****WEB PAGE****ASSEMBLY INSTRUCTIONS**