

## File 2H double emission wall

code F2H16.8TWX/01



### PRODUCT DESCRIPTION


Direct and indirect light with opal diffuser

### PRODUCT SPECS

|                           |                         |
|---------------------------|-------------------------|
| Installation method       | Wall surface mounted    |
| Light source              | LED                     |
| Absorbed power            | 2x51,2 W                |
| Color temperature         | Tunable White           |
| Color rendering index CRI | >90                     |
| Optic                     | Microprismatic diffuser |
| Finishing                 | White                   |
| MacAdam color tolerance   | 3                       |
| Life time estimate        | 50000h Ta 25° L80B10    |
| Energy efficiency class   | E                       |
| Dimension                 | L2265 mm                |



### FILE2H micro biemission LED

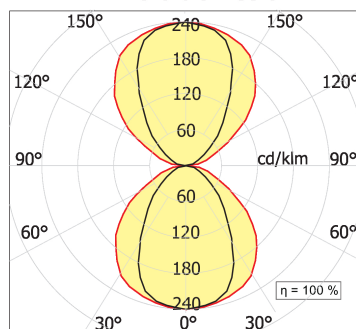

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

