
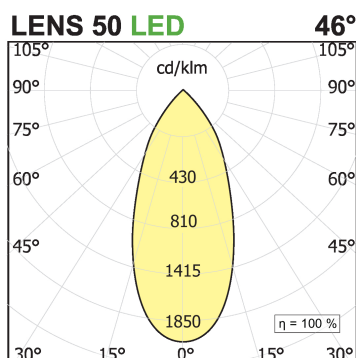
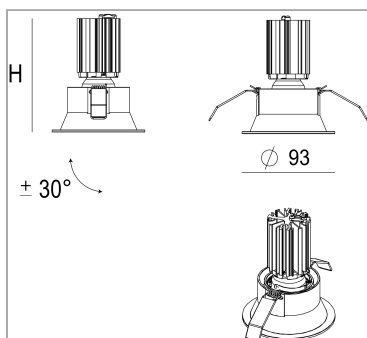


I-KONE recessed frame adjustable

code IK010.927W/01

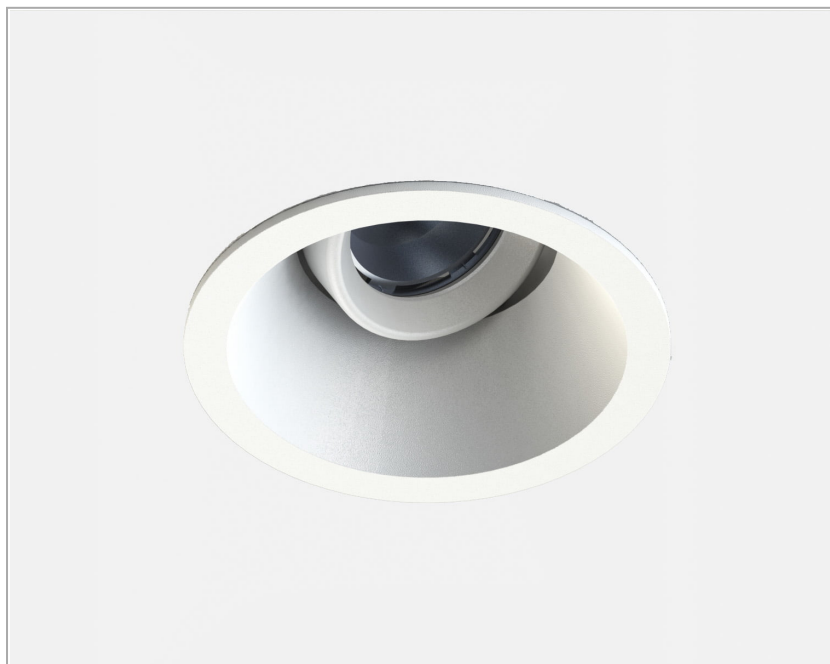

PRODUCT DESCRIPTION

Recessed direct light lamp with circular stop complete with LED 8 W or 12 W secondary optical color white, color rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; orientation of the automation group of +/- 30, on the horizontal axis; degree of protection IP20/23. Powder coating.

PRODUCT SPECS

Installation method	recessed with frame
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 46°
Finishing	White
Luminous flux of the product	1032 lm / 1257 lm
Luminous efficiency	129 lm/W / 105 lm/W
MacAdam color tolerance	2
Life time estimate	25000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H111 Ø84 mm
Hole size	Ø 86 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Product Spec	Adjustable
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

