

# I-KONE RECESSED MINIMAL FIXED

350

500














# code IK001.940F/01

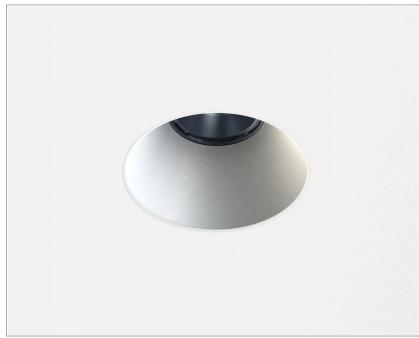





# PRODUCT DESCRIPTION

Direct recessed recessed lamp with circular shape, complete with LED 12 W or 18 W secondary colour white, colour rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with antiglare effect; degree of protection IP20/23. Powder coating.

#### **PRODUCT SPECS**

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1380 lm / 2394 lm
Luminous efficiency	115 lm/W / 133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H126 Ø86 mm
Hole size	Ø 77 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply
	1 117

## **WEB PAGE**



## **ASSEMBLY** INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

