
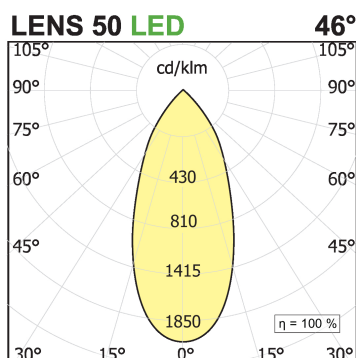
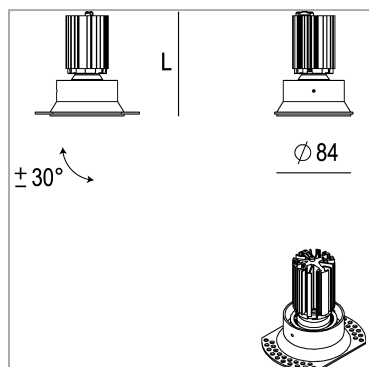


## I-KONE RECESSED MINIMAL FIXED

code IK001.940W/01

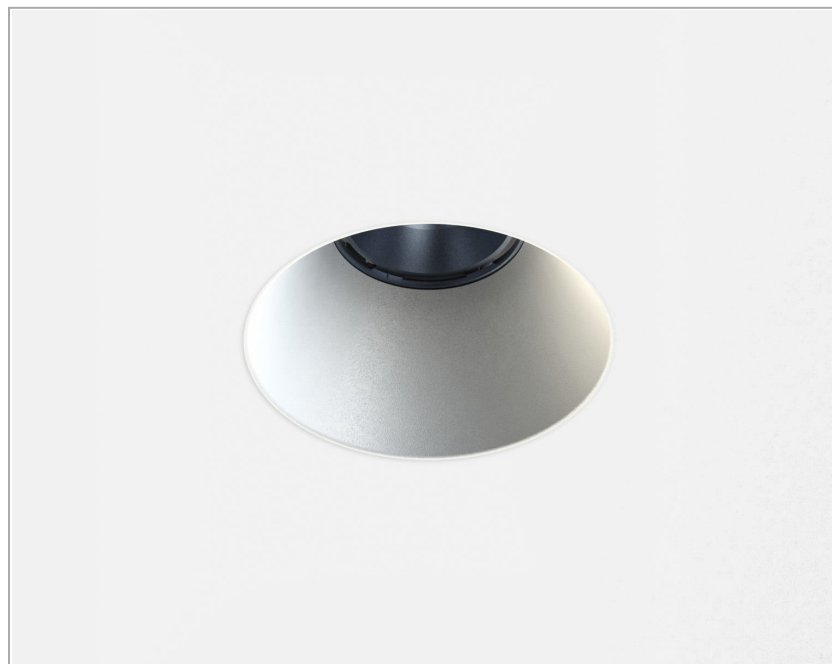

### PRODUCT DESCRIPTION

Direct recessed lamp with circular shape, complete with LED 12 W or 18 W secondary colour white, colour rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; degree of protection IP20/23. Powder coating.

### PRODUCT SPECS

|                              |                                         |
|------------------------------|-----------------------------------------|
| Installation method          | Trimless recessed                       |
| Light source                 | LED                                     |
| Absorbed power               | 12 W / 18 W                             |
| Color temperature            | 4000K                                   |
| Color rendering index CRI    | >90                                     |
| Optic                        | Wide 46°                                |
| Finishing                    | White                                   |
| Luminous flux of the product | 1380 lm / 2394 lm                       |
| Luminous efficiency          | 115 lm/W / 133 lm/W                     |
| MacAdam color tolerance      | 2                                       |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25°             |
| Energy efficiency class      | D                                       |
| Weight                       | 0.35 Kg                                 |
| Dimension                    | H126 Ø86 mm                             |
| Hole size                    | Ø 77 mm                                 |
| IP Grade                     | Inst. Parete Ip20 / Inst. Soffitto Ip23 |
| Protection Class             | Class III appliance                     |
| Power supply/Transformer     | Not included                            |
| Protocol                     | See power supply                        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



