


I-KONE RECESSED MINIMAL ADJUSTABLE

code IK004.927F/01


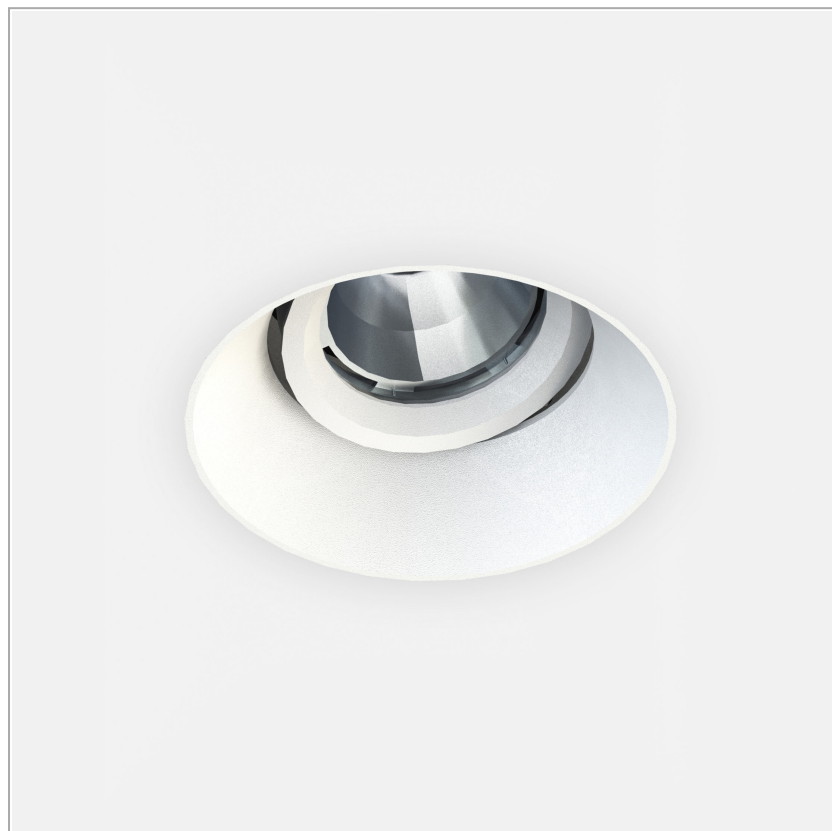


PRODUCT DESCRIPTION

Direct recessed recessed lamp with circular shape, complete with LED 12 W or 18 W secondary colour white, colour rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; orientation of the automation group of +/- 30, on the horizontal axis; degree of protection IP20/23. Powder coating.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1257 lm / 2268 lm
Luminous efficiency	105 lm/W / 126 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H118 Ø84 mm
Hole size	Ø 70 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Product Spec	Adjustable

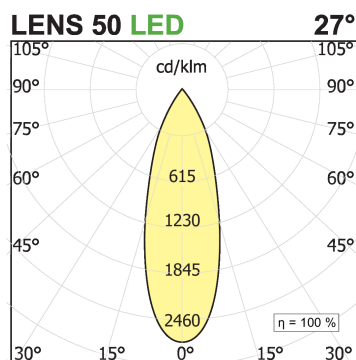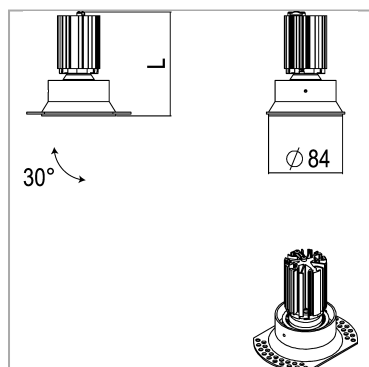

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

