


Quadra system Ceiling magnetic body

code QS03.930/01

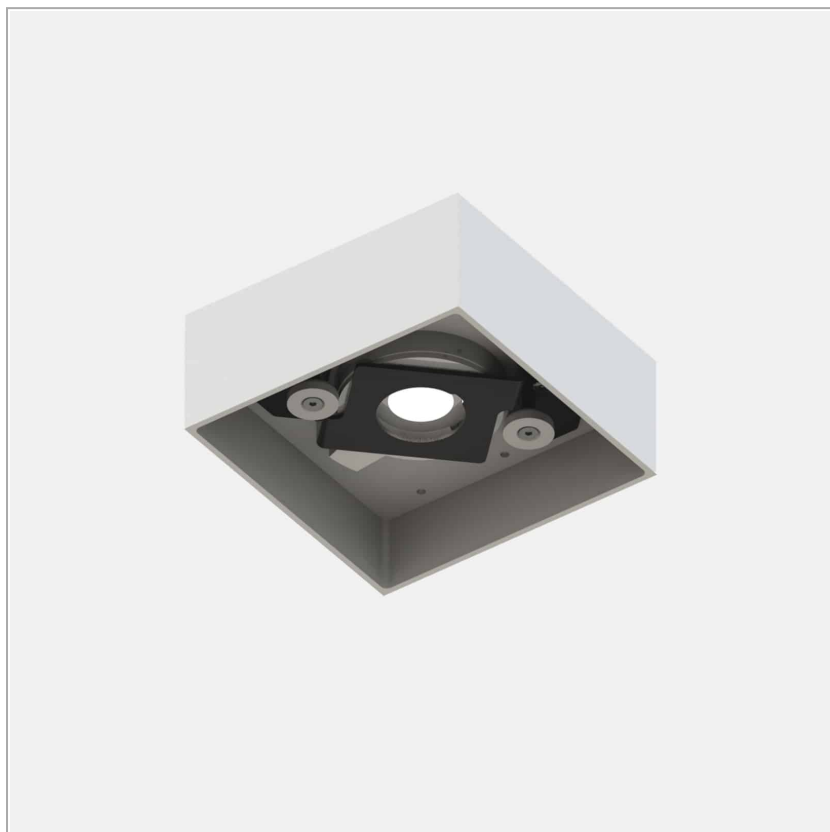


PRODUCT DESCRIPTION

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI > 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR < 19.

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	8,6 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	800 lm
Luminous efficiency	93 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Weight	0.90 Kg
Dimension	L98xW98xH42 mm
IP Grade	IP20

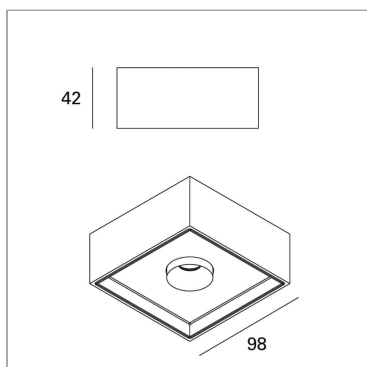

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Quadra SPOT SNOOTER




code QM100/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet



Accessori Quadra COVER A




code QM200/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet



Accessori Quadra COVER B



code QM201/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet

