


BEST MINIMAL ADJUSTABLE

code BT753.927FN/01

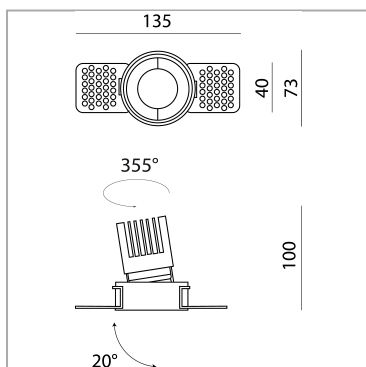

PRODUCT DESCRIPTION

Trimless direct adjustable recessed light, indoor, circular shape complete with high efficiency COB LEDs, CRI>90 polycarbonate secondary optics. Colour body white complete with . Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. Optical group removable from the ring that is fixed and grouted in plasterboard. Swivelling 360 ° on the vertical and tilting axis of +/-20 ° on the horizontal axis. Degree of protection IP20/23.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	White
Luminous flux of the product	1531 lm
Luminous efficiency	128 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.49 Kg
Dimension	L75xH104 Ø83 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



