


## BEST FRAME ADJUSTABLE

code BT751.935WN/01

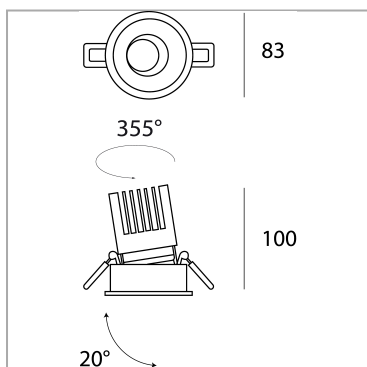

### PRODUCT DESCRIPTION

Adjustable direct light recessed lamp with stop, indoor, circular shape complete with high efficiency COB LED, CRI>90 secondary optics in polycarbonate. Colour body white complete with . Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. Optical group removable from the ring that is fixed and grouted in plasterboard. Swivelling 360 ° on the vertical and tilting axis of +/-20 ° on the horizontal axis. Degree of protection IP20/23.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 12 W                        |
| Color temperature            | 3500K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 38°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1560 lm                     |
| Luminous efficiency          | 130 lm/W                    |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.49 Kg                     |
| Dimension                    | L75xH112 Ø83 mm             |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

### WEB PAGE



