


Iride recessed frame fixed

code IR21.930W/01





PRODUCT DESCRIPTION

Recessed indoor projector with fixed projection, complete with led 34 W, color rendering index CRI >90. Lamp with color finish white. Lamp body and optical group made of powder-coated die-cast aluminium, springs in harmonic steel for quick installation. High performance polycarbonate lens. UGR<19

PRODUCT SPECS

| | |
|------------------------------|---------------------------------|
| Installation method | recessed with frame |
| Light source | LED |
| Absorbed power | 34 W |
| Color temperature | 3000K |
| Color rendering index CRI | >90 |
| Optic | Wide 36° |
| Finishing | White |
| Luminous flux of the product | 2596 lm |
| Luminous efficiency | 76 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Energy efficiency class | D |
| Dimension | H98.5 Ø114 mm |
| IP Grade | IP20 |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

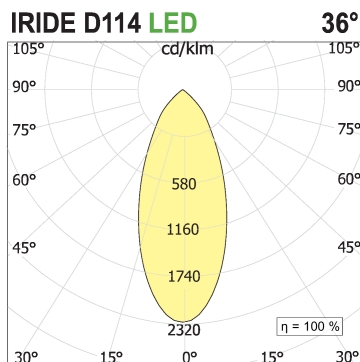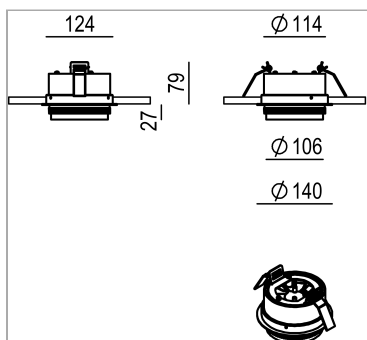

WEB PAGE




ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Private:



code L114R

Non-reflective accessory lens with a honeycomb structure, diameter 86 mm.

Technical Sheet



