


## Iride recessed minimal fixed

code IR25.940/01




### PRODUCT DESCRIPTION

Recessed projector shaved indoor fixed projection, complete with led 34 W, color rendering index CRI >90. Lamp with color finish white. Lamp body and optical group made of powder-coated die-cast aluminium, springs in harmonic steel for quick installation. High performance polycarbonate lens. UGR<19

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | recessed                        |
| Light source                 | LED                             |
| Absorbed power               | 34 W                            |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Wide 36°                        |
| Finishing                    | White                           |
| Luminous flux of the product | 3245 lm                         |
| Luminous efficiency          | 95 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Energy efficiency class      | D                               |
| Dimension                    | H98.5 Ø114 mm                   |
| IP Grade                     | IP20                            |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

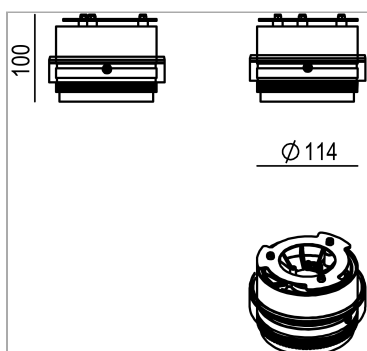

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Private:



code L114R

Non-reflective accessory lens with a honeycomb structure, diameter 86 mm.

Technical Sheet



