

Stick adjustable

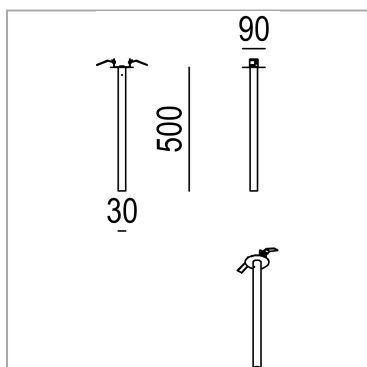
code SK010.927F/01

**PRODUCT DESCRIPTION**

Semi-recessed luminaire for indoor use, consisting of an aluminium tube with a diameter of 30 mm and a height of 500 mm. Complete with plasterboard ceiling fixture. Complete with LED bulb 8 W. Epoxy powder coated white color . Degree of protection IP20.

PRODUCT SPECS

Installation method	semi-recessed
Light source	LED
Absorbed power	8 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 40°
Finishing	White
Luminous flux of the product	270 lm
Luminous efficiency	34 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	H500 Ø30 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

**WEB PAGE**

MANDATORY ACCESSORIES

AE700.11C



code AE700.11C

Electronic power supply current

