

## Stick adjustable

code SK010.940S/01




### PRODUCT DESCRIPTION

Semi-recessed luminaire for indoor use, consisting of an aluminium tube with a diameter of 30 mm and a height of 500 mm. Complete with plasterboard ceiling fixture. Complete with LED bulb 8 W. Epoxy powder coated white color . Degree of protection IP20.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | semi-recessed                   |
| Light source                 | LED                             |
| Absorbed power               | 8 W                             |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Spot 28°                        |
| Finishing                    | White                           |
| Luminous flux of the product | 270 lm                          |
| Luminous efficiency          | 34 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Energy efficiency class      | E                               |
| Dimension                    | H500 Ø30 mm                     |
| IP Grade                     | IP20                            |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

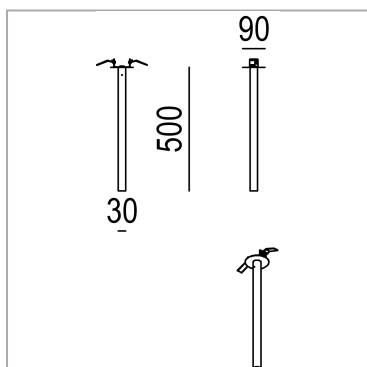

### WEB PAGE



## **MANDATORY ACCESSORIES**

### **AE700.11C**



code AE700.11C

Electronic power supply current

