
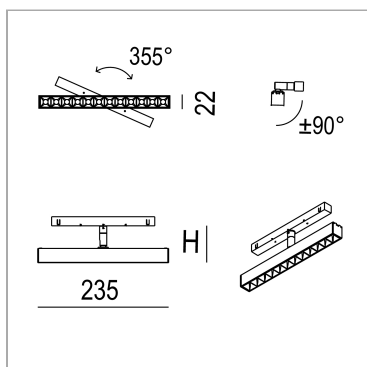


Grid Mini Track adjustable - deep recessed

code GRD11A.930FD/01



PRODUCT DESCRIPTION

Minigrig Mini Track is a family of linear light products that mounts a low voltage rail adapter with integrated DC/DC converter. It is characterized by a joint that make it adjustable. It is available in on-off or dimmable Dali version. Available in different sizes 235, 461mm. The body is in extruded aluminium. Available optics medium flood 24° and wide wide 36° certain. Available painted white or black.

Dimmable Dali / Touch & Dimm

PRODUCT SPECS

Installation method	Track
Light source	Led
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	White
Luminous flux of the product	560 lm
Luminous efficiency	70 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali / Touch & Dimm
Dimension	L235xH47 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 1