

## Bucolica spot 36

code BU003.940S/02





### PRODUCT DESCRIPTION

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Floor                       |
| Light source                 | LED                         |
| Absorbed power               | 8 W                         |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Spot 15°                    |
| Finishing                    | Black                       |
| Luminous flux of the product | 445 lm                      |
| Luminous efficiency          | 56 lm/W                     |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.3 Kg                      |
| Dimension                    | L75xH67 Ø36 mm              |
| IP Grade                     | Ip66                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

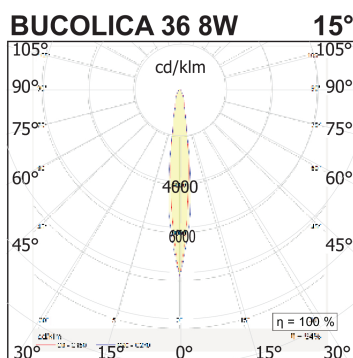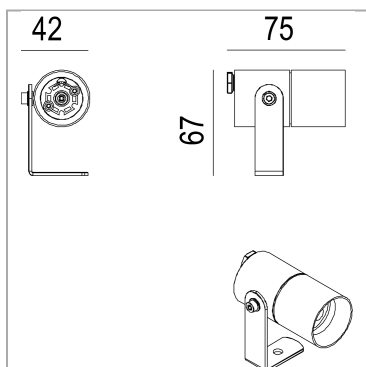

### WEB PAGE



## MANDATORY ACCESSORIES

### AE700.14IP (Copia)



code AE700.12IP

Electronic power supply current

## OPTIONAL ACCESSORIES

### Oblique cut cover Ø36



code BU027/02


Cover accessory for Bucolica 36, diam. 40, oblique cut.

Technical Sheet



### Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



