

## File Flex Circle 'O' Outdoor Diffuse Suspension

code FXG45.840/01





### PRODUCT DESCRIPTION

Outdoor circular suspension lamp made of extruded aluminium 6060, direct and diffused light emission, complete with LED 101 W, colour rendering index CRI>90. Transparent round power cable; steel suspension cables with millimetric regulator; Epoxy powder coating; Colour white. Protection class IP65.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Light source                 | LED                    |
| Absorbed power               | 101 W                  |
| Color temperature            | 4000K                  |
| Color rendering index CRI    | >90                    |
| Finishing                    | White                  |
| Luminous flux of the product | 15010 lm               |
| Luminous efficiency          | 149 lm/W               |
| MacAdam color tolerance      | 3                      |
| Life time estimate           | 50000h L90 B10 ta 25°C |
| Energy efficiency class      | D                      |
| Weight                       | 8 Kg                   |
| Dimension                    | Ø1500 mm               |
| IP Grade                     | IP65                   |
| Power supply/Transformer     | Not included           |
| Protocol                     | See power supply       |

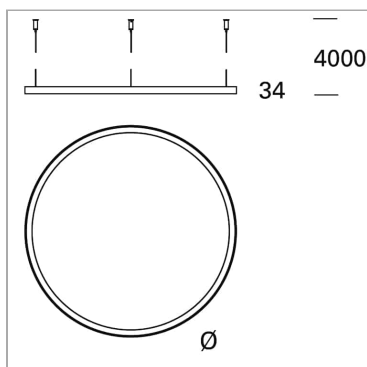

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 3

## OPTIONAL ACCESSORIES

### CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



