

App-eal 2 400mA

code APEB3.930/01





PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led
Absorbed power	19 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	2600 lm
Luminous efficiency	137 lm/W
Life time estimate	50000h L90 B10 Ta 25°C
Energy efficiency class	D
Dimension	L310xW100xH110 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

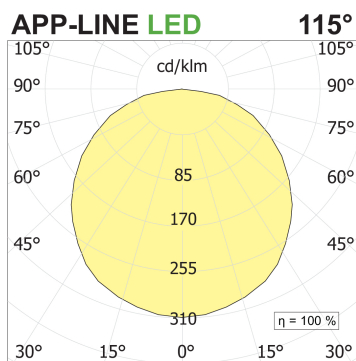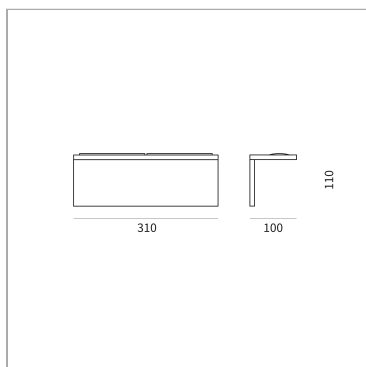

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE700.32C1.MP (Copia)



code AE700.30C.MP

Electronic power supply current

Technical Sheet

