


## NYX T-spot 55 trimless recessed

code LTN90.935F/01


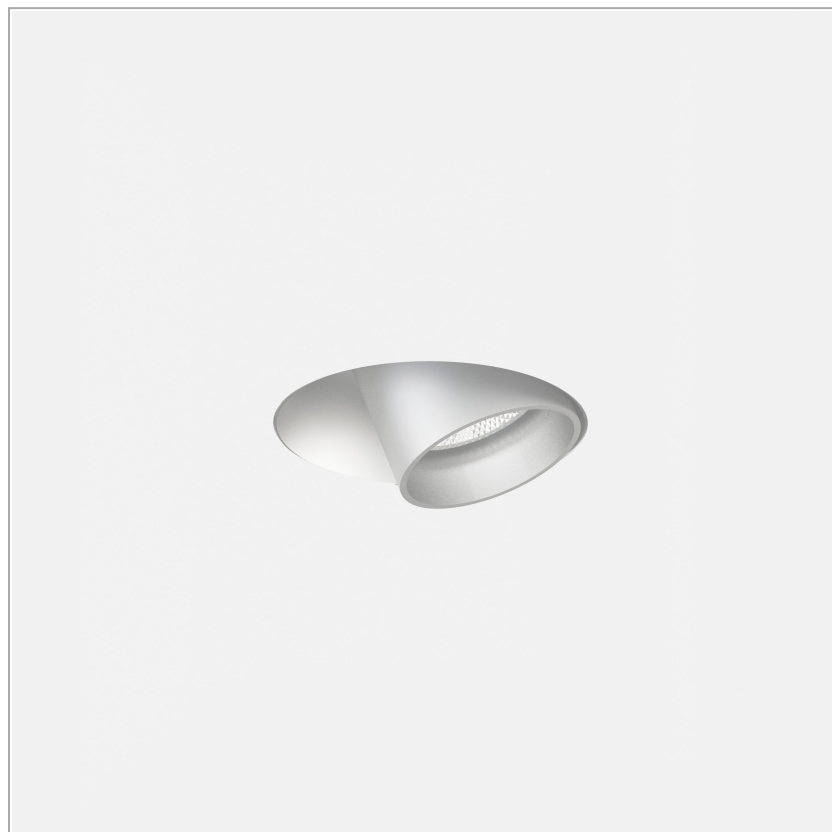


### PRODUCT DESCRIPTION

Trimless recessed fixture for plasterboard, round in shape, adjustable, for direct lighting. Light source in anti-glare recessed position. Optical unit adjustable 355° in the vertical axis and +/- 20° in the horizontal axis. Integrated LED source. Body and optical unit made of aluminum painted in white color. IP20/IP54 degree of protection.

### PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1285 lm / 2285 lm
Luminous efficiency	107 lm/W / 127 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H107 Ø89.5 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

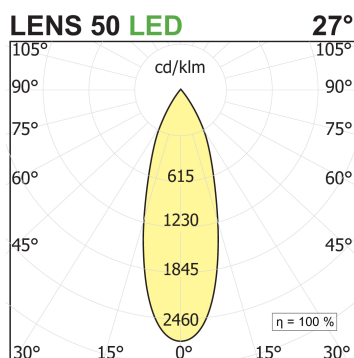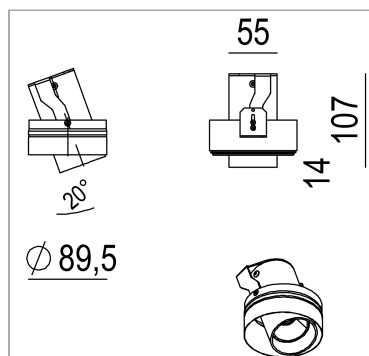

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1**



code AE500.20C1

Electronic power supply current