

## Corona 2 spots for support

code CR002.930F/01




### PRODUCT DESCRIPTION

Free-standing fixture for direct lighting. Horizontal installation and complete with professional LED sources. Metal product with painted finish. IP40 degree of protection.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Light source                 | LED                         |
| Absorbed power               | 2x18 W                      |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 4716 lm                     |
| Luminous efficiency          | 131 lm/W                    |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | On/Off                      |
| Energy efficiency class      | D                           |
| Dimension                    | L384 Ø55 mm                 |
| IP Grade                     | IP20                        |
| Power supply                 | 220-240V 50-60Hz            |

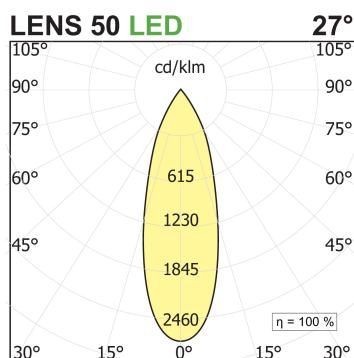

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



