

Ibrida wall 1800 light 2 spots and indirect

code IB032.930ZD/01





PRODUCT DESCRIPTION

Lamp for wall h 1800 mm. Characterized by an extruded aluminum profile. Direct light, 2 spots d.40 led 17 W + indirect light line led 17W, ballast included. Color finish white. Protection class IP20.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x8 W / 17 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Asymmetric Z18°x38°
Finishing	White
Luminous flux of the product	1019 lm
Luminous efficiency	64 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L40xW126xH1800 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

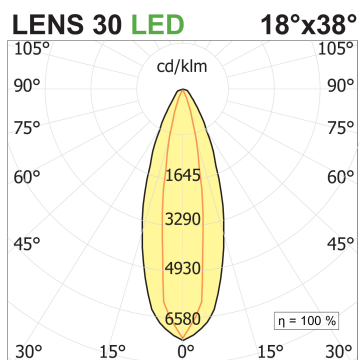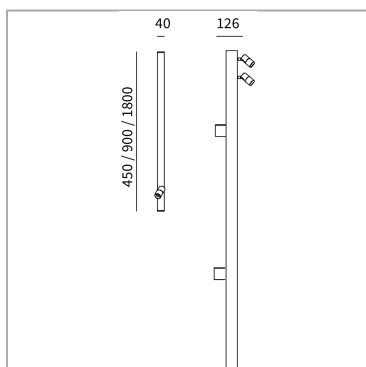

WEB PAGE



ASSEMBLY INSTRUCTIONS




Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

OPTIONAL ACCESSORIES

Ibrida Command Module



code IB100/01

Light switch and dimming accessory module that allows you to control the switching on, switching off and intensity of the light itself, directly on the product.

Technical Sheet

