

Ibrida wall 1800 1 spot e indirect

code IB031.927ZD/01





PRODUCT DESCRIPTION

Wall lamp h 1800 mm. Characterized by an extruded aluminum profile. Direct light, 1 spot Led 8W and indirect light, line Led 17W, ballast included. Color finish white. Protection class IP20.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	8 W / 17 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric Z18°x38°
Finishing	White
Luminous flux of the product	490 lm
Luminous efficiency	61 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L40xW126xH1800 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

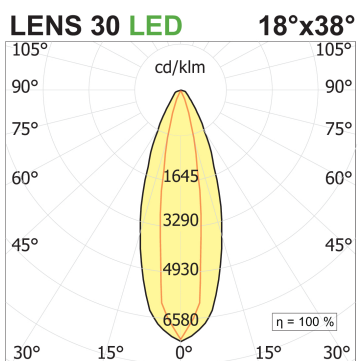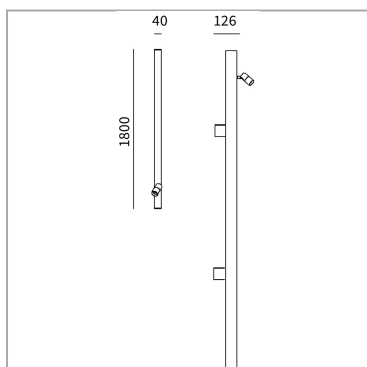

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Ibrida Command Module



code IB100/01

Light switch and dimming accessory module that allows you to control the switching on, switching off and intensity of the light itself, directly on the product.

Technical Sheet

