

## Ibrida ground luce 2 spots e indirect

code IB012.935ZD/01




### PRODUCT DESCRIPTION

Ground lamp h 2200, base 220x220 mm. Characterized by an extruded aluminum profile. Led line 16 W with two spots and indirect light. Power supply included. Color white finish. Protection class IP20.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Floor                       |
| Light source                 | LED                         |
| Absorbed power               | 2x8 W / 17 W                |
| Color temperature            | 3500K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Asymmetric 41°X18°          |
| Finishing                    | White                       |
| Luminous flux of the product | 1034 lm                     |
| Luminous efficiency          | 65 lm/W                     |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | Dimmable Dali               |
| Energy efficiency class      | D                           |
| Dimension                    | L220xH2200 mm               |
| IP Grade                     | IP20                        |
| Power supply                 | 220-240V 50-60Hz            |

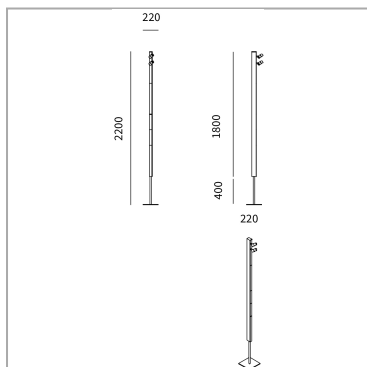

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



