



Minifile mix ceiling direct light

code MM016.930/01

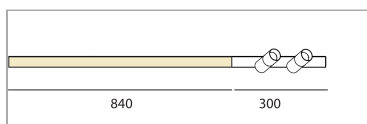

PRODUCT DESCRIPTION

Extruded aluminum profiles 62x32mm, for ceiling and suspension installation with linear LED sources, diffused light, modules with microoptics with controlled anti-glare luminance and spot focus Ø 36 mm, complete with electronic power supply 230/240V. Painted or anodized finish. Diffuser screens in opaline and side closing heads with Light Proof system. Degree of protection IP20.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Linea Led
Absorbed power	19,2 W / 2x8 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	2976 lm / 1390 lm
Luminous efficiency	155 lm/W / 87 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Weight	2.20 Kg
Dimension	L1140xH92 mm

WEB PAGE

