


## Minifile mix ceiling direct light with Leva

code MM011.935W/01


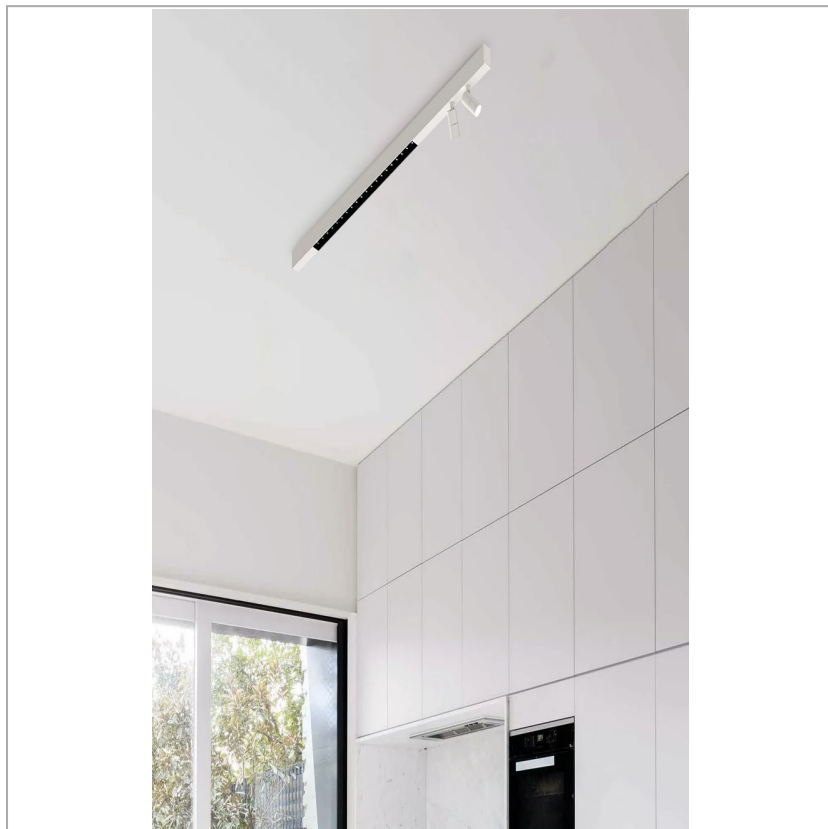


### PRODUCT DESCRIPTION

Indoor direct light ceiling lamp made of extruded aluminum 6060, color rendering index CRI >90. 15 chip on board led sources + 1 spot focus diam. 36 8W, protocol On/Off. Lamp with color finish white box - black optic; IP20 degree of protection.

### PRODUCT SPECS

|                              |                                                           |
|------------------------------|-----------------------------------------------------------|
| Installation method          | Ceiling surface mounted                                   |
| Light source                 | LED                                                       |
| Absorbed power               | 15x2,2 W / 8 W                                            |
| Color temperature            | 3500K                                                     |
| Color rendering index CRI    | >90                                                       |
| Optic                        | Wide 50°                                                  |
| Finishing                    | White box - black optic                                   |
| Luminous flux of the product | 2701 lm / 695 lm                                          |
| Luminous efficiency          | 82 lm/W / 87 lm/W                                         |
| MacAdam color tolerance      | 2 / 3                                                     |
| Life time estimate           | 50000h Ta 25°<br>L90B10 / 3SDCM 50000h<br>L90 B10 Ta 25°C |
| Protocol                     | On/Off                                                    |
| Energy efficiency class      | E                                                         |
| Weight                       | 2.20 Kg                                                   |
| Dimension                    | L1140xH92 mm                                              |
| IP Grade                     | IP20                                                      |
| Power supply                 | 220-240V 50-60Hz                                          |

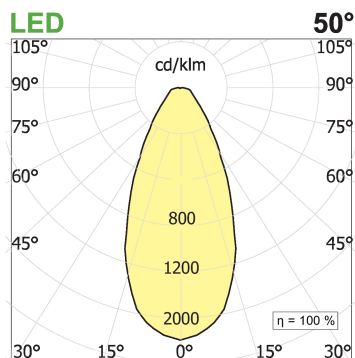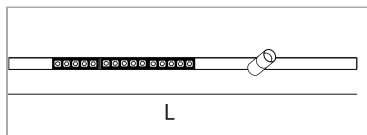

### WEB PAGE

