

## App-line 2 400mA

code APSB3.935/01





### PRODUCT DESCRIPTION

Diffused light indoor wall lamp characterised by a geometric line and ultra-minimal dimensions. Complete with 2x LED 19 W beam 115°, colour rendering index CRI>90, temperature 3500°K. Epoxy powder coating. Colour white. LED current 400mA. Protection class IP40.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Wall surface mounted   |
| Light source                 | Led                    |
| Absorbed power               | 19 W                   |
| Color temperature            | 3500K                  |
| Color rendering index CRI    | >90                    |
| Finishing                    | White                  |
| Luminous flux of the product | 2600 lm                |
| Luminous efficiency          | 137 lm/W               |
| Life time estimate           | 50000h L90 B10 Ta 25°C |
| Energy efficiency class      | D                      |
| Dimension                    | L440xW100xH37 mm       |
| IP Grade                     | IP40                   |
| Protection Class             | Class III appliance    |
| Power supply/Transformer     | Not included           |
| Protocol                     | See power supply       |

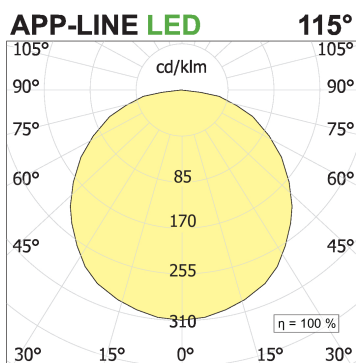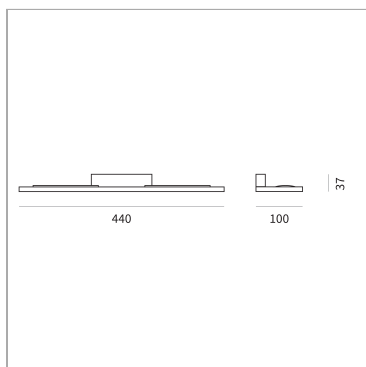

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### **AE700.32C1.MP (Copia)**



code AE700.30C.MP

Electronic power supply current

Technical Sheet

