

App-line 1 400mA

code APS03.930/01




PRODUCT DESCRIPTION

Diffused light indoor wall lamp characterised by a geometric line and ultra-minimal dimensions. Complete with 1 LED optical unit 10 W beam 115°, temperature 3000°K, colour rendering index CRI>90. Epoxy powder-coated. Colour white. Led current 400mA. Protection class IP40.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	10 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1300 lm
Luminous efficiency	130 lm/W
Life time estimate	50000h L90 B10 Ta 25°C
Energy efficiency class	D
Dimension	L100xW310xH37 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

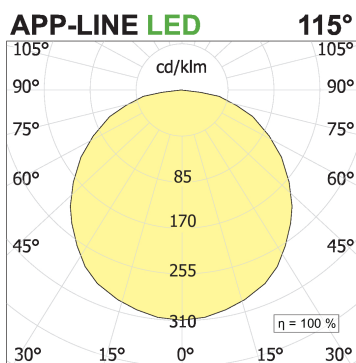

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE700.32C1.MP (Copia)



code AE700.30C.MP

Electronic power supply current

Technical Sheet



