



code MN001.930/01

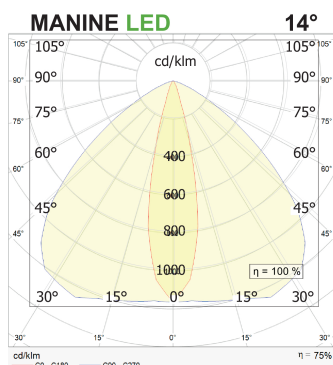

Indoor luminaire for outdoor corner, bi-emission for diffuse lighting. Complete optical assembly with professional LED sources 26 W, complete with ballast. 270° outdoor corner version with 120x120 mm metal body, 30 mm wall projection white. IP40 degree of protection.

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x13 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1380 lm
Luminous efficiency	53 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	A
Weight	0.82 Kg
Dimension	L120xH120 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

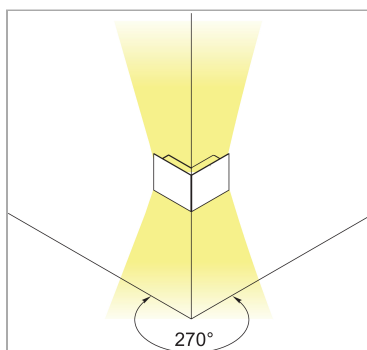

Page 1 / 1