

## Manine diffused 270-V vertical biemission

code MN001.935/01





### PRODUCT DESCRIPTION

Indoor luminaire for outdoor corner, bi-emission for diffuse lighting. Complete optical assembly with professional LED sources 26 W, complete with ballast. 270° outdoor corner version with 120x120 mm metal body, 30 mm wall projection white. IP40 degree of protection.

### PRODUCT SPECS

|                           |                        |
|---------------------------|------------------------|
| Installation method       | Wall surface mounted   |
| Light source              | LED                    |
| Absorbed power            | 2x13 W                 |
| Color temperature         | 3500K                  |
| Color rendering index CRI | >90                    |
| Finishing                 | White                  |
| MacAdam color tolerance   | 3                      |
| Life time estimate        | 50000h L80 B10 ta 25°C |
| Energy efficiency class   | A                      |
| Weight                    | 0.82 Kg                |
| Dimension                 | L120xH120 mm           |
| IP Grade                  | IP40                   |
| Power supply              | 220-240V 50-60Hz       |

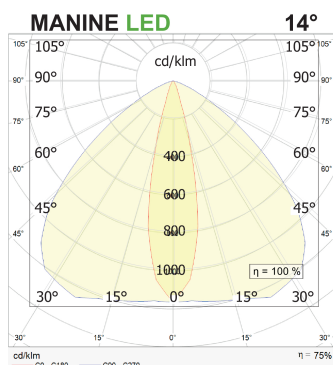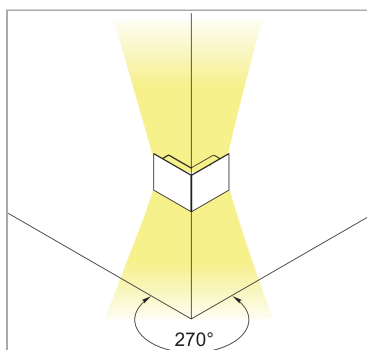

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1