


## File H system- Spot indirect

code FR044.930W/01

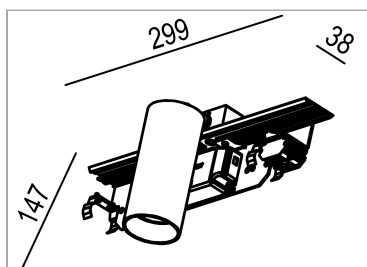

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 120x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, suspended. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20 or IP40 protection rating.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | system                      |
| Light source                 | LED                         |
| Absorbed power               | 12 W                        |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 46°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1350 lm                     |
| Luminous efficiency          | 113 lm/W                    |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | On/Off                      |
| Energy efficiency class      | D                           |
| Weight                       | 0.75 Kg                     |
| Dimension                    | L300xW38xH147 Ø55 mm        |
| IP Grade                     | IP20                        |
| Power supply                 | 220-240V 50-60Hz            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

