

## Silicone lighting module Nanofile system

code NN05830.misura




### PRODUCT DESCRIPTION

Modular system for diffused outdoor lighting, composed of empty profiles in anodized extruded aluminum available in predefined lengths, trimless recessed version. Side end caps with Light Proof system. To be completed with silicone light element complete with LED linear sources and with 24V power supply to be installed remotely. IP67.

### PRODUCT SPECS

|                              |                           |
|------------------------------|---------------------------|
| Installation method          | Trimless recessed, system |
| Light source                 | Linea Led                 |
| Absorbed power               | 48 W                      |
| Color temperature            | 3000K                     |
| Color rendering index CRI    | >80                       |
| Luminous flux of the product | 4900 lm                   |
| Luminous efficiency          | 102 lm/W                  |
| Protocol                     | On/Off                    |
| Energy efficiency class      | D                         |
| Dimension                    | mm                        |
| IP Grade                     | IP67                      |
| Power supply/Transformer     | Not included              |
| Protocol                     | See power supply          |

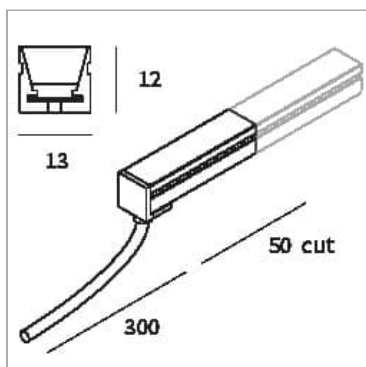

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

