

Window Frame 224

code WI001.940/01




PRODUCT DESCRIPTION


Recessed wall or ceiling luminaire for indoor diffuse lighting. Installation by means of plasterboard, or by means of its galvanised sheet metal formwork for concrete. Professional LED modules 12.4 W 4000°K. Remote ballast to be integrated. Colour white. Degree of protection IP20.

PRODUCT SPECS

| | |
|------------------------------|------------------------|
| Installation method | Recessed with frame |
| Light source | LED |
| Absorbed power | 12,4 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Finishing | White |
| Luminous flux of the product | 814 lm |
| Luminous efficiency | 66 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 50000h L90 B10 Ta 25°C |
| Protocol | On/Off |
| Energy efficiency class | E |
| Dimension | L224xW80xH281 mm |
| Hole size | 208x208 mm |
| IP Grade | IP20 |
| Protection Class | Class III appliance |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

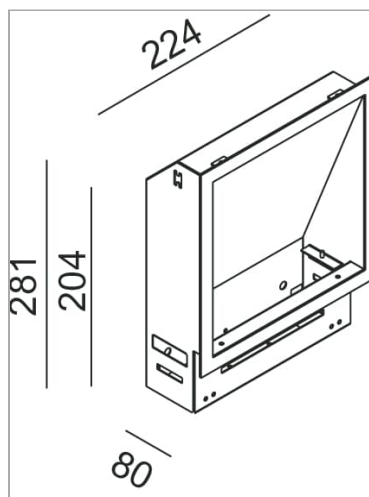

WINDOW LED

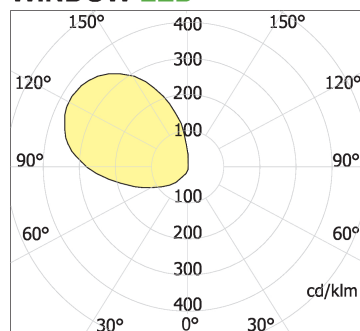

WEB PAGE




ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Wallbox Window Wallbox for window 224



code LT1692

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article WINDOW 224

Technical Sheet



AE350.16C (Copia)



code AE350.15C

Electronic power supply current