

Step 300

code LT1981BC/01




PRODUCT DESCRIPTION


Rectangular recessed spotlight with 20° inclined source

PRODUCT SPECS

Installation method	Recessed with frame, Wall surface mounted
Light source	LED
Absorbed power	1,5 W
Color temperature	3000K
Color rendering index CRI	90
Finishing	White
Luminous flux of the product	252 lm
Luminous efficiency	1,5 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	E
Weight	0.7 Kg
Dimension	W27xH370 mm
Hole size	29X372 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

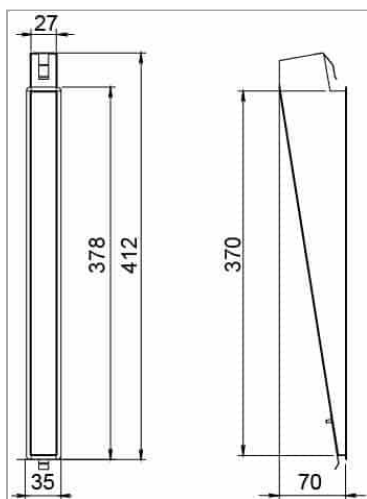

STEP LED

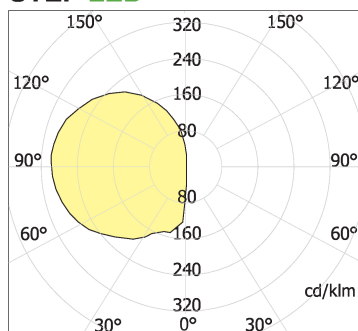

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Wallbox Wallbox step 300

code LT1990

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article STEP 300

Technical Sheet



AE500.6C



code AE500.6C

Electronic power supply current