

Guide System Spot focus 90

code GU005.927W/01

D

E

500

700

CRI
>90


IP20

III

LED
incl.

UK
CA

CE

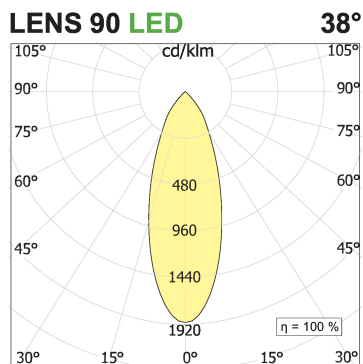

PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, equipped with hook for installation on the profile; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish bianco.

PRODUCT SPECS

Installation method	system
Light source	Led
Absorbed power	17 W / 24,3 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Bianco
Luminous flux of the product	1790 lm / 2370 lm
Luminous efficiency	105 lm/W / 98 lm/W
MacAdam color tolerance	>3 / 3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D / E
Weight	0.94 Kg
Dimension	H110 Ø90 mm
IP Grade	IP20
Protection Class	Class III appliance
gruppi alimentatori	500mA

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lens With Ring Satin lens with ring ø85



code L085S.A

uncategorized. White finishing

Technical Sheet



code L085S.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Asymmetric lens with ring ø85



code L085A.A

uncategorized. White finishing

Technical Sheet



code L085A.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Elipsoid lens with ring ø85



code L085E.A

uncategorized. White finishing

Technical Sheet





code L085E.A

uncategorized. Black finishing

Technical Sheet




Accessori Lens With Ring Honeycomb louver with ring ø85



code L085R.A

uncategorized. White finishing

Technical Sheet



code L085R.A

uncategorized. Black finishing

Technical Sheet

