

Window Minimal M224

code WI101.940/01




PRODUCT DESCRIPTION


Recessed recessed luminaire flush with wall or ceiling for indoor diffuse lighting. Installation for plasterboard or concrete. Professional LED modules 12.4 W 4000°K. Remote control gear to be integrated. Colour white. Degree of protection IP20.

PRODUCT SPECS

| | |
|------------------------------|---|
| Installation method | Trimless recessed, Wall surface mounted |
| Light source | LED |
| Absorbed power | 12,4 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Finishing | White |
| Luminous flux of the product | 814 lm |
| Luminous efficiency | 66 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 50000h L90 B10 Ta 25°C |
| Protocol | On/Off |
| Energy efficiency class | E |
| Dimension | L200xW85xH400 mm |
| Hole size | 200x200 mm |
| IP Grade | IP20 |
| Protection Class | Class III appliance |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

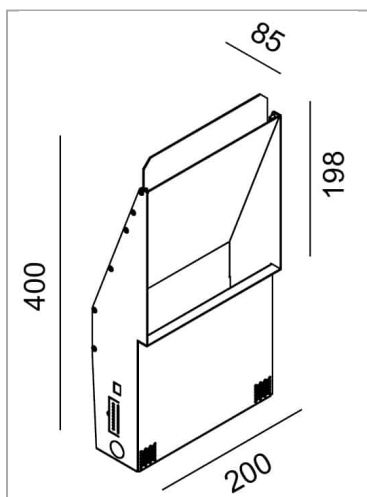

WINDOW LED

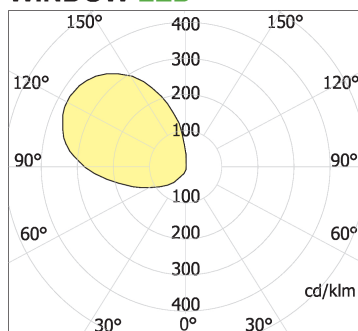

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE350.16C (Copia)



code AE350.15C

Electronic power supply current